


FEMALE END VIEW




- 1 = GREEN/YELLOW
2 = BROWN
3 = BLUE



**BROWN & BLUE TO VDC
GREEN TO GROUND**

SPECIFICATIONS


CONTACT CARRIER MATERIAL/COLOR	TPU/YELLOW
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	9.0 A
RATED VOLTAGE [V]	300 V
OUTER JACKET MATERIAL/COLOR	TPU/YELLOW
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	3x18 AWG
TEMPERATURE RANGE	-40°C to +80°C (-40°F to +176°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

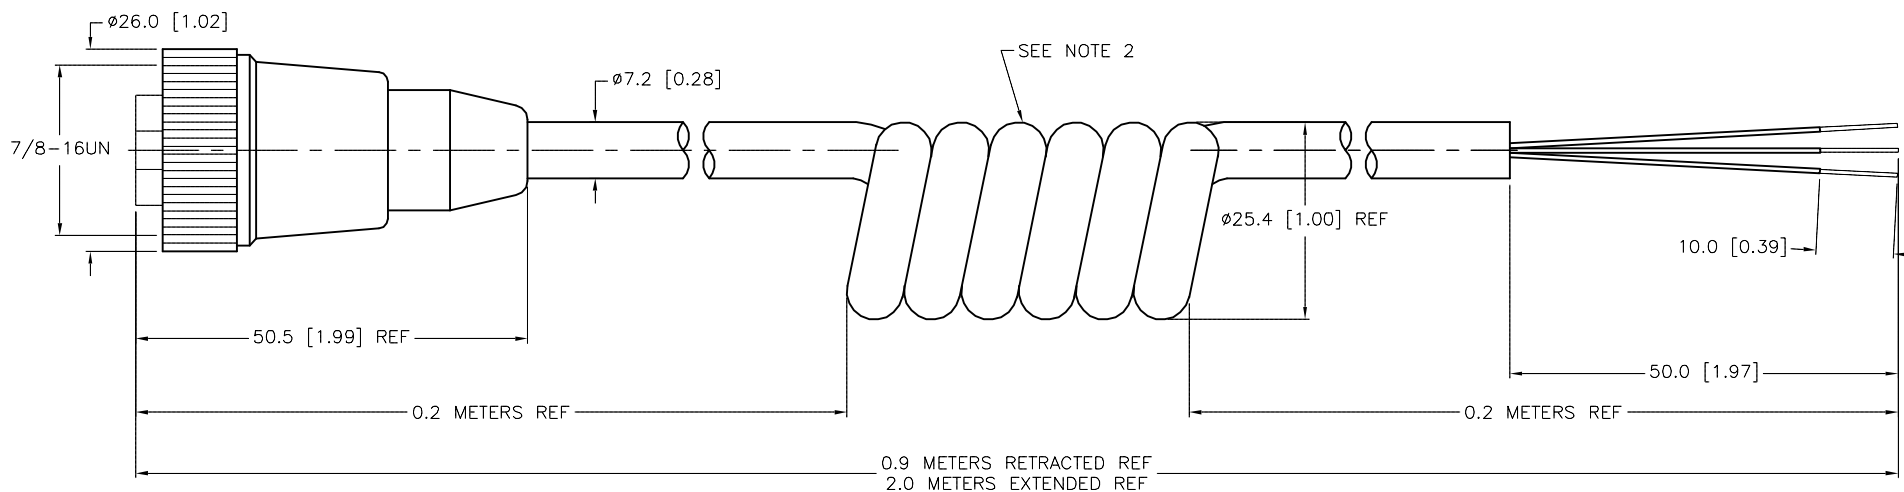

NOTES:

1. "/S90" DESIGNATES POLYURETHANE (TPU) CABLE.
2. NUMBER OF COILS IS REFERENCE ONLY.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK INC High Technology Sensors and Automation Controls 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com			
							
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	RWC	DATE	02/22/07	DESCRIPTION RKM 30-2M/S90-SP	
SEE SPECIFICATIONS		DSGN		SCALE	1=1.0		
FINISH		UNIT OF MEASUREMENT				IDENTIFICATION NO. MCS-12876	
SEE SPECIFICATIONS		MILLIMETER [INCH]					
		DO NOT SCALE THIS DRAWING				FILE: U2135	
						SHEET 1 OF 1	

D	REMOVE PIGTAIL TOLERANCES	CK	01/18/11	33990
REV	DESCRIPTION	BY	DATE	ECO NO.