




MALE END VIEW

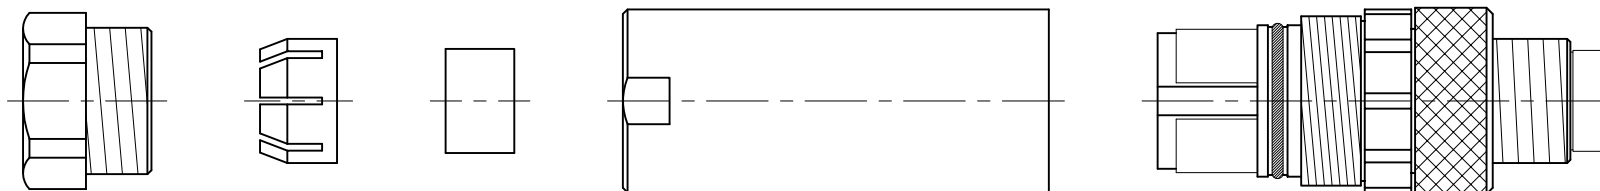

SPECIFICATIONS

HOUSING MATERIAL/COLOR	NYLON/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	75 VDC/60 VAC
MAXIMUM WIRE SIZE	22 AWG
CABLE GRIP RANGE	3-5mm
TEMPERATURE RANGE	-40°C to +85°C (-40°F to +185°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67
CONDUCTOR TERMINATION	SCREW TERMINALS

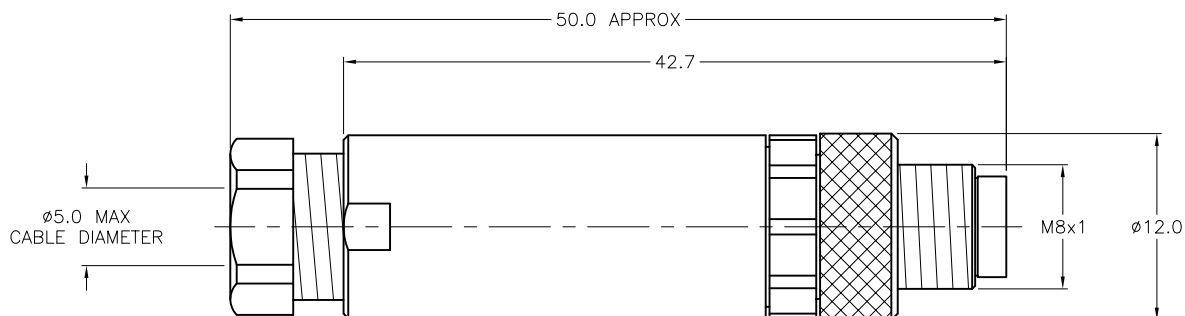

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. TURCK INC <i>High Technology Sensors and Automation Controls</i>		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com			
1.									
2.		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT	JB	DATE	11/06/00	DESCRIPTION	BS 5133-0
3.				DSGN		SCALE	1=.5		
4.		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETERS DO NOT SCALE THIS DRAWING			IDENTIFICATION NO.		REV
SEE SPECIFICATIONS							MCT-13560		B
FINISH							FILE: U6512		SHEET 1 OF 1
SEE SPECIFICATIONS									

NOTE: 0.9 MM HEX KEY TOOL PROVIDED

B	ADDED EXPLODED VIEW	RWC	06/10/05	13222
REV	DESCRIPTION	BY	DATE	ECO NO.